

WHY FLUIDMASTER?



747 + holder
G 3/8 brass



747
G 3/8 brass



747
G 1/2 brass



HDV
G 3/8 brass



Ident. No.	747E-036-P20	747E-037-P20	747U-038-P20	229109
EAN code	3838912063496	3838912063502	3838912063519	3838912011916
Shank	G 3/8 brass	G 3/8 brass	G 1/2 brass	G 3/8 brass
Connection to water	side	side	side	side
Type	hydraulic	hydraulic	hydraulic	mechanical
Noise level	Class 1	Class 1	Class 1	Class 1
Water level adjustable	✓	✓	✓	✓
For high and low pressure	0,2 – 16 bar	0,2 – 16 bar	0,2 – 16 bar	0,1 – 10 bar

FLUSH VALVES OVERVIEW



Ident. No.	550B-005-P15	820F-013-P15
EAN code	3838912063489	3838912063526
Flushing type	dual flush	dual flush
Flushing adjustment possibilities	full flush, partial flush	full flush, partial flush
Activation type	mechanical	mechanical
Activation button position	top, side or front	top
Cistern button hole	Ø 18 – 40 mm	Ø 40 mm
Outlet (thread on valve outlet)	G 2 (Ø 59,614 mm)	G 2 (Ø 59,614 mm)
Fits cisterns	with hole at the bottom of the cistern Ø 60,3 – 64,4 mm	with hole at the bottom of the cistern Ø 60,3 – 64,4 mm

FILL VALVE HDV, brass shank G 3/8, side inlet



Purpose

- Suitable for concealed and exposed flushing cisterns


Properties

- Durable mechanical filling valve
- Extremely robust filling valve
- Side mount valve
- Resistant to small-sized particles in inflow water
- Extremely quiet operation (Classe 1)
- Short filling time
- Water level adjusting screw
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 3/8 x 21 mm

Technical drawing

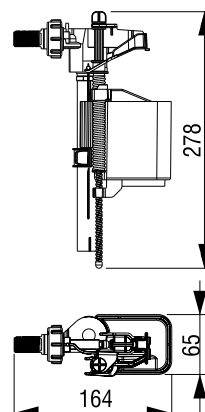

Article number: **229109**
 EAN-Code: 3838912011916
 Packing: 40 Pcs./carton

www.fluidzon.com



FILL VALVE HVK, brass shank G 3/8, side inlet



Purpose

- Suitable for concealed and exposed flushing cisterns


Properties

- Durable hydraulic filling valve
- Side mount valve
- Extremely quiet operation (Classe 1)
- Fast filling time
- Water level adjusting screw
- Telescopic tube
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Brass shank G 3/8 x 33 mm

Technical drawing

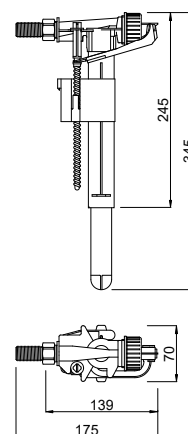

Article number: **8035432795**
 EAN-Code: 8711778074460
 Packing: 36 Pcs./carton



FLUSH VALVE 550, outlet G 2



Purpose

- Suitable for ceramic cisterns


Properties

- Dual flush valve with mechanical activation
- Adjustable overflow height (215,9 – 342,9 mm)
- Cable length 550 mm for maximum flexibility
- Full and partial flush option available
- Easily activated with dual flush button
- Possibility of installing the activation button in different positions of the cistern (top, front, side)
- For cistern button hole 18 - 40 mm
- Adjustable for many ceramic cisterns
- Long lasting silicone seal
- Robust design
- Fast and easy to install
- Installation sheet included
- Proven and reliable quality
- Consistent performance

Technical characteristic

- Outlet G 2

Technical drawing

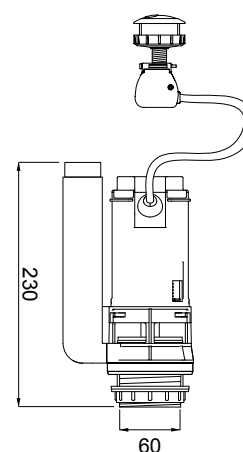

Article number: **550B-005-P15**
 EAN-Code: 3838912063489
 Packing: 15 Pcs./carton

