


FILL VALVE 747, brass shank G 3/8, side inlet, with holder



Article number: 747E-036-P20
EAN-Code: 3838912063496
Packing: 20 Pcs./carton

- Purpose**
- Suitable for concealed and exposed flushing cisterns
 - Suitable for ceramic cisterns
- Properties**
- Durable hydraulic filling valve
 - Compact filling valve
 - Side mount valve
 - Suitable for high and low pressure
 - Extremely quiet operation (Classe 1)
 - Short filling time
 - Water level adjusting screw
 - Anti-corrosion material
 - Self-cleaning system
 - Fast and easy to install
 - Instruction manual included
 - Proven and reliable quality
 - Consistent performance
- Special features**
- Diffuser included
 - Holder included
- Technical characteristic**
- Brass shank G 3/8 x 35 mm

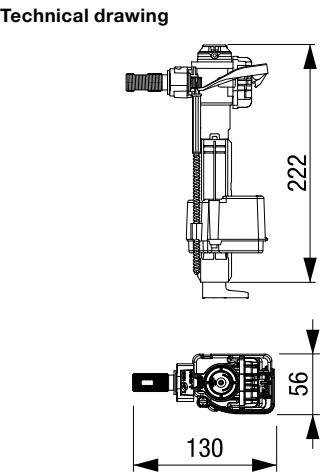


FILL VALVE 747, brass shank G 3/8, side inlet



Article number: 747E-037-P20
EAN-Code: 3838912063502
Packing: 20 Pcs./carton

- Purpose**
- Suitable for concealed and exposed flushing cisterns
 - Suitable for ceramic cisterns
- Properties**
- Durable hydraulic filling valve
 - Compact filling valve
 - Side mount valve
 - Suitable for high and low pressure (restrictor added in the shank)
 - Extremely quiet operation (Classe 1)
 - Short filling time
 - Water level adjusting screw
 - Anti-corrosion material
 - Self-cleaning system
 - Fast and easy to install
 - Instruction manual included
 - Proven and reliable quality
 - Consistent performance
- Technical characteristic**
- Brass shank G 3/8 x 39 mm

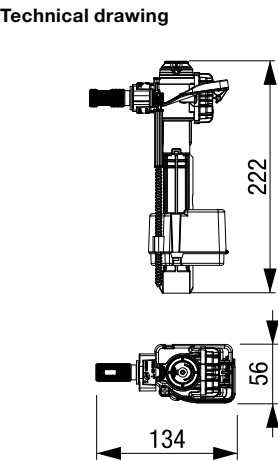

FILL VALVE 747, brass shank G 1/2, side inlet



Article number: 747U-038-P20
EAN-Code: 3838912063519
Packing: 20 Pcs./carton

- Purpose**
- Suitable for concealed and exposed flushing cisterns
 - Suitable for ceramic cisterns
- Properties**
- Durable hydraulic filling valve
 - Compact filling valve
 - Side mount valve
 - Suitable for high and low pressure (restrictor added in the shank)
 - Extremely quiet operation (Classe 1)
 - Short filling time
 - Water level adjusting screw
 - Anti-corrosion material
 - Self-cleaning system
 - Fast and easy to install
 - Instruction manual included
 - Proven and reliable quality
 - Consistent performance
- Technical characteristic**
- Brass shank G 1/2 x 44 mm

